

HARVIA LEGEND

HPO165400

The Harvia Legend provides you with the ultimate sauna experience. This large heater takes you back to the origins of heaters – it is a heater in its purest form. The patinated steel frame of the Harvia Legend contains a large amount of stones that gives off great steam even in large saunas as it heats up. Due to the open structure of the stone compartment, you can throw water on the entire outer surface of the heater. The heat charged in the large number of stones allows you to throw more water even at a lower temperature – you can enjoy delightfully humid steam in your sauna. Due to its circular shape, the Harvia Legend heater can be installed in the middle of the sauna or embedded into the bench. The heater is controlled by a separate control unit.



Features

Main material : Steel

H x W x D : 830.0 x 600.0 x 600.0 mm

Net weight (kg) : 33.0

Installation location : Floor

ID	GTIN	Output (kW)	Sauna room size min - max m3
HP0165400	6410082662173	16.5 kW	16.0-35.0


Related products



SASP0240



SASP0240L



SFE-D530



AC3020




Spare parts

Product	ID	Pcs
Adjusting leg M10x60 x 4 pcs, floor mounted heaters	SPZSA-442	1
Heating element 2500W 230V	SPZSP-250	3
Heating element 3000W 230V	SPZSP-255	3
Adjustable foot M10x40 4 pcs (replacer SPZSA-442)	SPZSA-440	1


Technical details

Technical data	Type / attribute	HP0165400
	Color	Black
	Power output	16.5 kW
	Stone sizes	Ø10–15 cm
	Stone amount (kg)	220
Dimensions	Product width	600
	Product height	830
	Product depth (mm)	600
	Net weight (kg)	33
	Gross weight	35
	Package width	620
	Package height	870
	Package depth	620
Safety and installation dimensions	Safety distance front (non-combustible materials)	100
	Safety distance front (combustible materials)	100
	Safety distance right side (combustible materials)	150
	Safety distance right side non-combustible materials	150
	Safety distance left side (combustible materials)	150
	Safety distance left side non-combustible materials	150
	Safety distance side (non-combustible materials)	150
	safety distance to the side wall (combustible materials)	150
	Safety distance behind (non-combustible materials)	150
	Safety distance behind (combustible materials)	150
	Safety distance (Ceiling)	1250
	Room min. height(depends on connections and therefore from output, star/delta)	2100
	Installation opening height	2080
	Installation opening width	730
	Installation opening depth	730

Technical images

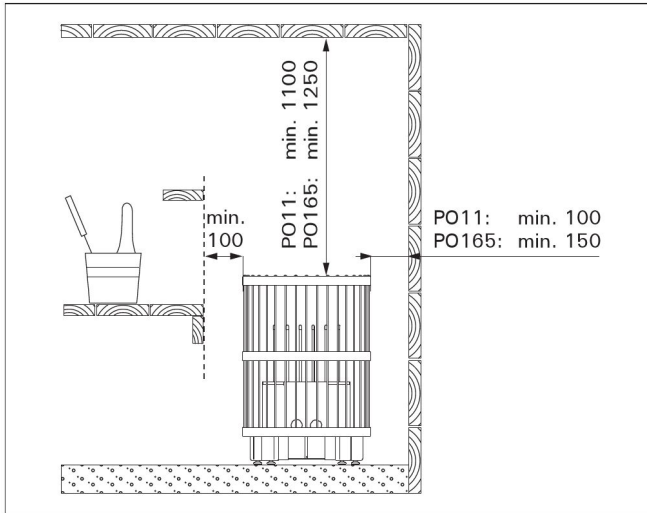


Safety distances (all dimensions in millimeters)




KIUAS AGGREGAT HEATER OFEN КАМЕНКА KERIS	VASTUKSET VÄRMEELEMENT HEATING ELEMENT HEIZELEMENT НАГРЕВАТЕЛЬНЫЕ ЭЛЕМЕНТЫ KÜTTELEMENT	TEHO EFFEKT OUTPUT LEISTUNG МОЩНОСТЬ VOIMSUS	OSANRO BETECKNING PART NO. TEIL NR. НОМЕР ДЕТАЛИ OSA NR.
PO11	1, 2, 6 3, 4, 5	2150 W/230 V 1500 W/230 V	ZSP-240 ZSS-110
PO165	1, 2, 6 3, 4, 5	3000 W/230 V 2500 W/230 V	ZSP-255 ZSP-250

We recommend to use only the manufacturer's spare parts.

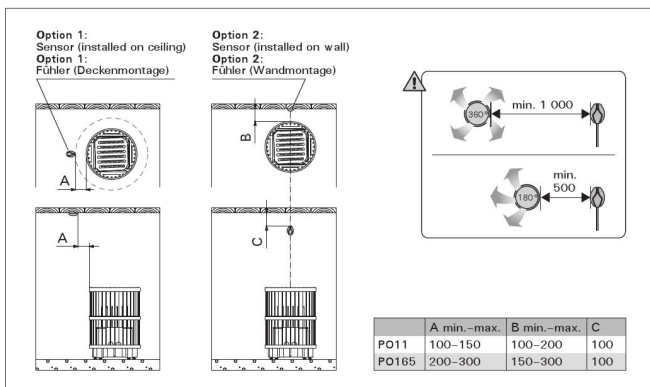

Installing the Temperature Sensor (all dimensions in millimeters)

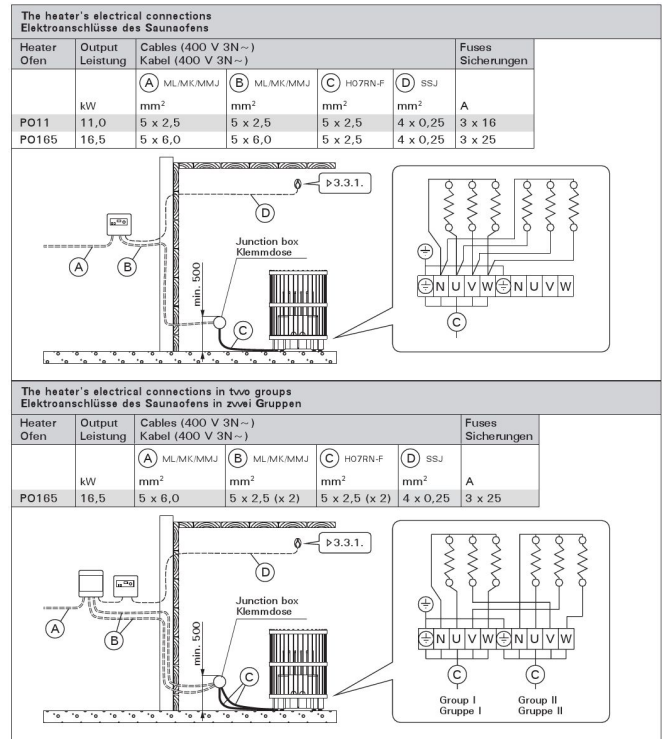

Electrical connections