

# HARVIA THE WALL

HSWE900400

*Harvia The Wall heater was created with a focus on functionality. Easy installation, and durable structure make The Wall heater versatile in its features. The model E sauna heater is controlled by a separate control unit.*

## Advantages

- Compact, stylish and reliable heater for medium-sized sauna rooms
- The space-saving heater fits in a great variety of saunas
- Controlled by a separate control unit
- Option to integrate heater in sauna bench
- Durable structure and technical features extend heaters lifespan



## Features

Main material : Steel


H x W x D : 700.0 x 380.0 x 260.0 mm

Net weight (kg) : 11.9

Installation location : Wall

| ID         | GTIN          | Output (kW) | Sauna room size min - max m3 |
|------------|---------------|-------------|------------------------------|
| HSWE900400 | 6410082660308 | 9 kW        | 8.0-14.0                     |

## Related products




SFE-220400



HSW5



HSW5L



HSW1



HSW5



## Spare parts

| Product                                        | ID        | Pcs |
|------------------------------------------------|-----------|-----|
| Heating element support The Wall E/Combi, AlZn | SPZWA-077 | 1   |
| Heating element support, The Wall              | SPZWA-007 | 1   |
| Heating element 3000W 230V                     | SPZCU-830 | 3   |
| Temperature sensor (125C limiter) white        | SP248     | 1   |

## Technical details

| Technical data                     | Type / attribute                                                               | HSWE900400      |
|------------------------------------|--------------------------------------------------------------------------------|-----------------|
|                                    | Color                                                                          | Stainless Steel |
|                                    | Power output                                                                   | 9 kW            |
|                                    | Stone sizes                                                                    | Ø5–10 cm        |
|                                    | Stone amount (kg)                                                              | 20              |
| Dimensions                         | Product width                                                                  | 380             |
|                                    | Product height                                                                 | 700             |
|                                    | Product depth (mm)                                                             | 260             |
|                                    | Net weight (kg)                                                                | 11.9            |
|                                    | Gross weight                                                                   | 13.5            |
|                                    | Package width                                                                  | 460             |
|                                    | Package height                                                                 | 623             |
|                                    | Package depth                                                                  | 264             |
| Safety and installation dimensions | Safety distance front (non-combustible materials)                              | 30              |
|                                    | Safety distance front (combustible materials)                                  | 30              |
|                                    | Safety distance right side (combustible materials)                             | 80              |
|                                    | Safety distance right side non-combustible materials                           | 80              |
|                                    | Safety distance left side (combustible materials)                              | 80              |
|                                    | Safety distance left side non-combustible materials                            | 80              |
|                                    | Safety distance side (non-combustible materials)                               | 80              |
|                                    | safety distance to the side wall (combustible materials)                       | 80              |
|                                    | Safety distance (Ceiling)                                                      | 1200            |
|                                    | Room min. height(depends on connections and therefore from output, star/delta) | 1900            |
|                                    | Installation opening height                                                    | 1900            |
|                                    | Installation opening width                                                     | 540             |
|                                    | Installation opening depth                                                     | 290             |

## Technical images



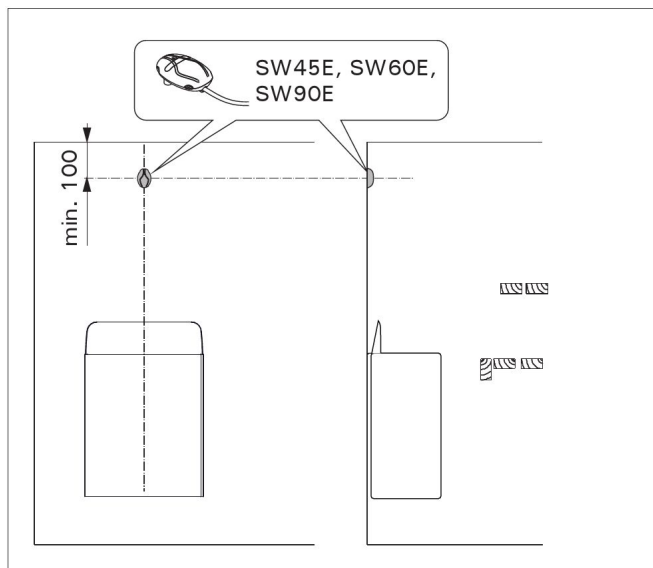


Figure 6. Installing the sensor (all dimensions in millimeters)

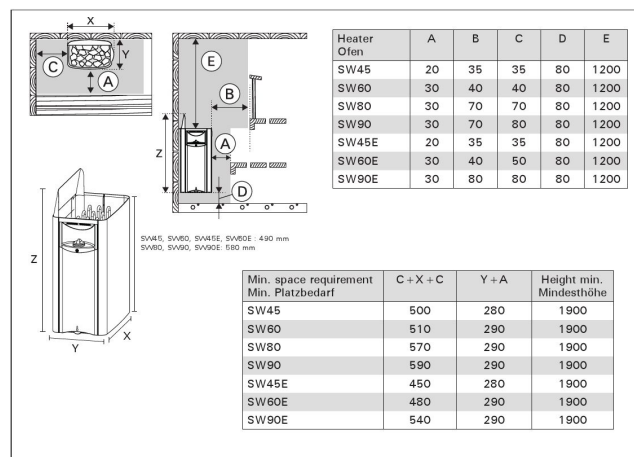

Minimum safety distances (all measurements in millimeters)

30

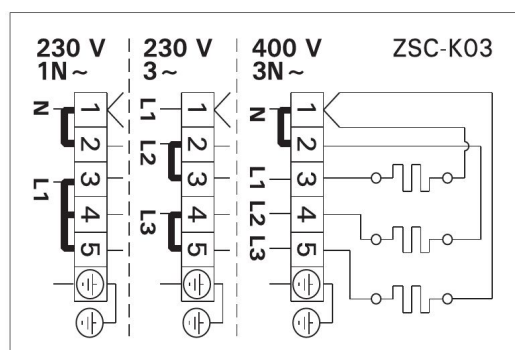

| Heater<br>Ofen | 400V 3N~                  |                                                                  | 230V 1N~                  |                                                                  |
|----------------|---------------------------|------------------------------------------------------------------|---------------------------|------------------------------------------------------------------|
|                | Fuses<br>Sicherungen<br>A | Power cable<br>Anschlusskabel<br>H07RN-F<br>min. mm <sup>2</sup> | Fuses<br>Sicherungen<br>A | Power cable<br>Anschlusskabel<br>H07RN-F<br>min. mm <sup>2</sup> |
| SW45E          | 3 x 10                    | 5 x 1,5                                                          | 25                        | 6                                                                |
| SW60E          | 3 x 10                    | 5 x 1,5                                                          | 35                        | 10                                                               |
| SW90E          | 3 x 16                    | 5 x 2,5                                                          | 50                        | 10                                                               |

Electrical connections (SW45E, SW60E, SW90E)